

OFFICIAL JOURNAL OF THE AUSTRALIAN INSTITUTE OF ENERGY

ENERGY NEWS

www.aie.org.au



VOLUME 36 NO 4 - DEC 2018



Electricity in Australia

Achieving a cost-effective power supply
Stand-alone power systems, digitally-enabled grids



ISSN 1445-2227
(International Standard Serial
Number allocated by the National
Library of Australia)

ENERGY NEWS

JOURNAL CORRESPONDENCE, ADVERTISING AND EDITORIAL

Sally Bogle
email: editor@aie.org.au

Members (and non-members) may place advertisements in **ENERGYNEWS** on behalf of themselves or their organisations.

Advertisements can include products, services, consulting, and positions vacant and required.

Discounts are available for members and for all advertisements repeated in two or more issues.

SUBSCRIPTION INFORMATION

ENERGYNEWS is published by the Australian Institute of Energy and is provided to all members as part of the membership subscription. Non-members may obtain copies of this journal by contacting either the Secretariat or the Editor.

CONTRIBUTIONS WELCOME

Articles on energy matters, letters to the editor, personal notes and photographs of those involved in the energy sector are welcomed.

PUBLISHED BY

The Australian Institute of Energy
ABN 95 001 509 173

Registered Office & Postal Address

PO Box 576
Crows Nest NSW 1585
Telephone: +61 2 9431 8694 or
1800 629 945
email: aie@aie.org.au

Web Address

www.aie.org.au

Print Post Approved No.

PP 100000796

DISCLAIMER

Although publication of articles submitted is at the sole and absolute discretion of the Australian Institute of Energy, statements made in this journal do not necessarily reflect the views of the Institute.

The editor reserves the right to amend and reduce the length of articles as required and takes responsibility for any accidental errors.

Note: Unless otherwise stated, all currency denominations are in Australian dollars.



CONTENTS

AIE PRESIDENT'S MESSAGE 2

**CAN THE PRIVATE SECTOR PROVIDE
MARKET RELIABILITY?** 3

**ACHIEVING COST-EFFECTIVE POWER
SUPPLY FOR AUSTRALIA** 7

**THE GROWING POTENTIAL FOR
STAND-ALONE POWER SYSTEMS** 11

THE DIGITALLY-ENABLED GRID 13

WESTERN AUSTRALIA TRIALS SPS 15

**PREPARING THE GRID FOR THE
UPTAKE OF EVs** 17

**DEMAND RESPONSE SYSTEMS FOR
POWER USERS** 20

AROUND THE BRANCHES 21

The front cover photo is of Canadian Solar's Longreach solar farm in Queensland. The photo above shows Edify Energy's Gannawarra solar farm in Victoria.

PREPARING THE GRID FOR THE UPTAKE OF EVS

By Tim McGrath, Partner and Natasha Santha, Principal at L.E.K. Australia with David Finn, CEO & Co-Founder and Nathan Dunlop, Head of Market Strategy at Tritium

This article summarises the findings of a joint report published in November 2018 by L.E.K. Consulting and Brisbane-based technology company Tritium, which specialises in the design and manufacture of DC fast-charging solutions for electric vehicles (EVs). It examines why utilities need to start responding to the challenges associated with EV uptake, together with a five-step action plan to help companies take advantage of this impending change.

EVs are on the cusp of wide-scale adoption. Governments around the world are introducing incentives, targets and tightening fuel regulations to encourage greater EV uptake. At the same time, car manufacturers are improving EV technology, lowering purchase prices and producing a wider range of models to give consumers greater choice, making EVs even more attractive for early adopters.

Currently, there are over 4 million EVs in operation globally. This is expected to grow rapidly to 50 million by 2025 and to 125 million by 2030. As demand for EVs increases, there will be a growing requirement for appropriate charging infrastructure. Although early adopters have tended to charge at home, as EV use becomes more widespread there will be a need for a greater number and variety of available charging options (Figure 1), especially for those who do not have access to charging in the home or workplace.

The International Energy Agency (IEA) estimates that by 2030 the number of public and private charging stations required globally will exceed 130 million units, which is close to 30 times the current stock.

This level of growth provides an unprecedented opportunity for electricity network owners, operators and retailers. EVs are one of the few growth drivers for many developed energy markets, and they may enable utility companies to build closer customer relationships.

However, EVs also come with a number of challenges, namely the increased peak demand at a localised level, increased network management complexity and power quality impacts.

Challenges ahead

The growing demand for energy from EVs is likely to affect the grid in three ways: increased overall consumption, increased peak demand, and greater unpredictability. Of these, the most important is the impact on peak demand, and how this is managed, particularly at a localised level.

	AC Level One	AC Level Two	DC Fast Charge	DC High Power
Power required	1.9kW	2.5 to 19.2kW	50kW	350kW
Charge time	~16 hours	~2-12 hours	~20-40 minutes	~6-8 minutes
Grid connection	Residential	Residential	Public	Direct to grid

Note: Charge time based on a 40kWh battery size. DC High Power — Charge time is applicable when EVs are capable of this charging speed
Source: L.E.K. and Tritium analysis

Figure 1: Electric vehicle charging infrastructure

Increased overall consumption

The expected increase in overall energy demand is relatively modest in the short to medium term. In 2017, the estimated electricity demand from all EVs was 54TWh, equating to just 0.3% of global electricity demand. With 125 million EVs anticipated to be on the road in 2030 assuming a similar level of battery energy efficiency as today, the overall EV share of energy demand will increase to 6.3% in 2030. Even though by 2030, every fifth vehicle sold globally is likely to be electric, the car parc (total cars in a pool) takes approximately 15 years to churn over. A country that has a 20% EV share of new car sales in any given year will only benefit from a corresponding change of 1.3% of the overall car parc. At full EV penetration the impact will be significant, but this is not expected for a considerable time.

Increased peak demand

What is more impactful is the expected increase in peak demand, particularly at a localised level. Statistics of sales of EVs to date have shown there is a 'clustering' effect, where some suburbs, streets and locations have a higher proportion of EV ownership.

This is likely to persist into the future with back-to-base charging locations for shared and/or autonomous vehicles and a greater number of roadside banks of high-powered charging infrastructure. Clusters of EVs have the potential to overload local electricity infrastructure, especially the feeder lines (ie. the 'poles and wires' down the street).

If utilities are not proactive in managing or incentivising residential charging in lower-demand times, localised peak demand will increase. Owning an EV will increase a household's electricity consumption by about 50%.

If multiple houses on a single street decide to charge simultaneously, there may be insufficient capacity in the feeder lines to deliver the required level of power. The timing of this scenario eventuating will vary and could take longer in regions where the cost economics and acceptance of EVs are less than internal combustion engine vehicles.

High-power charging may be more manageable for network operators. High-power chargers, up to 350kW each, are typically installed as a group of chargers. While these groups of high-power chargers equate to very large (1MW+) connections, the charger owners will deploy the appropriate infrastructure adjacent to the charging equipment at the time of installation.

The large, high-power connections and their associated equipment will be connected into the medium-voltage-level grid, which has a much higher power level typically used for commercial and industrial connections that can better accommodate non-linear, large power demands.

From a system-wide perspective, the impact on peak demand is expected to be less pronounced than it is at the local level. EV owners will likely have varied charging patterns, which ultimately averages out the peakiness. For example, some owners will top up charge every day at work or at home overnight, others will fully charge at fast-charging stations, and fleet owners of shared and autonomous vehicles are likely to charge back at base using high-powered charging during the day or slow charging overnight.

Putting these various load curves together, for example in Australia, if the car parc consisted of 50% EVs, the overall increase in peak demand could be around 15% (Figure 2), if charging times are not managed. Given the expected pace of adoption, this will take time to eventuate, allowing grid owners to prepare for the impending change.

Greater unpredictability

Consequently, EV charging has the potential to reduce grid predictability and increase network management complexity. Network owners need to be prepared to manage local grid impacts regarding both power quality and any increased asset stress.

Charging has an element of randomness, and drivers will recharge their vehicles at different locations and for varying lengths of time whenever required. This unpredictability creates non-linear power demand, and coupled with increasing distributed power generation (eg. solar PVs), the local-level network has never been more challenging to manage.

Non-linear and unpredictable load demands of EV charging, if unmanaged, can increase the risk of stress on localised network areas, especially on aging infrastructure. This could decrease asset lifetimes and increase replacement rates of assets and consumables such as transformers, fuses and cabling.

Opportunities for utilities

There are several opportunities for utilities to proactively manage and mitigate grid impacts:

- EVs represent an opportunity for increased demand, offsetting the stagnation in energy demand expected across a number of developed countries;
- They facilitate the integration of intermittent generation sources such as renewables. EVs are essentially a flexible demand-side market participant, which can help balance instantaneous supply;
- EVs have the potential to increase the value of the regulated asset base through new network connections and upgrades, conversely also reducing the risk of stranded assets;
- They offer the potential for new unregulated revenue streams that come from owning and managing EV charging assets and related advanced metering products;
- They allow grid owners that typically have low interaction with their customer base the opportunity to develop increased customer trust and closer relationships. Innovative EV-related products can also be bundled with related and existing offers (eg. solar and batteries) to increase customer stickiness; and
- With EVs capable of supporting bi-directional charging (vehicle to grid technology), there are opportunities for EVs to become a dynamic flexible new energy source. Utilities could encourage EV owners to charge up from excess intermittent sources like solar and wind at times of low demand, and then use the energy stored in the vehicle to power their houses when they need it or sell it back to the grid.

Proactive responses


Utilities need to be proactive in planning for a future scenario of significant EV adoption, especially in a world where spending capex on additional infrastructure at the cost of the consumer is no longer a palatable response. If utilities are not prepared and this transition is not managed effectively, they could become a barrier to scale EV adoption. In response, utilities can undertake the following (Figure 3):

Utilise smart software

Power quality impacts at the residential feeder level could be alleviated using smart software. Managed charging uses software to schedule home charging throughout the night, avoiding the risk of many EV owners all plugging in during the evening peak. Some utilities are learning from air conditioning incentive programmes and are beginning to subsidise home charging equipment if the customer is happy to give the network operator some control over when the charger is used.

Design tariffs and demand response programmes

Utilities need to begin preparing incentive structures to manage residential chargers, such as time of use EV tariffs that can shift customer charging behaviour to alleviate local feeder stress. For example, advanced use of tariffs and developments in car technology

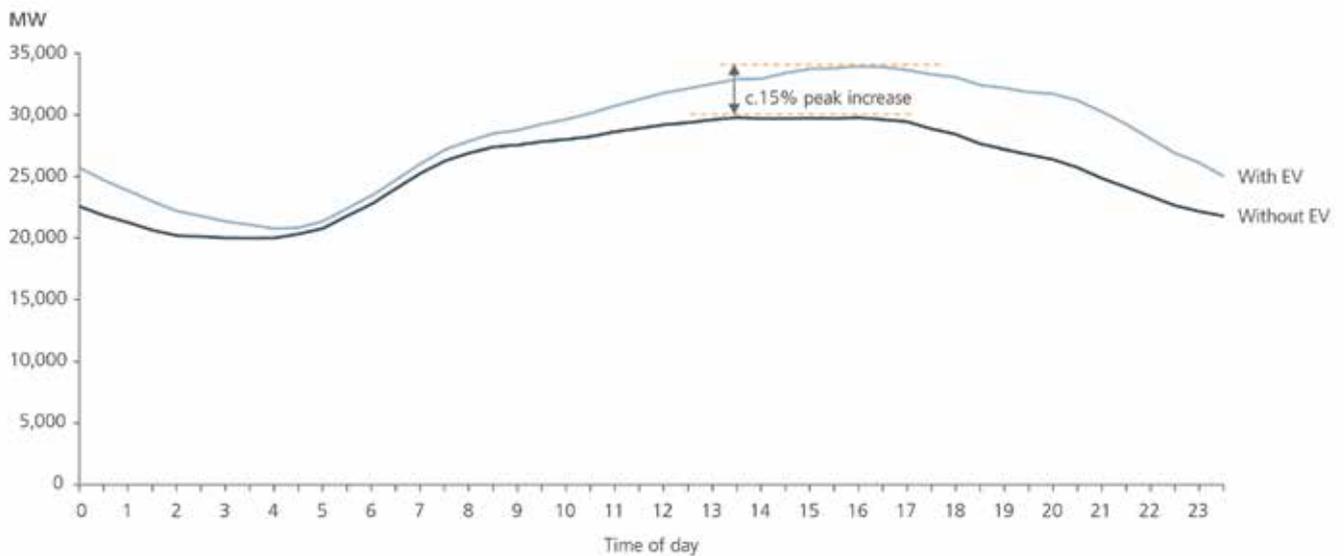

Source: L.E.K. and Tritium analysis

Figure 2: EV impact on the Australian electricity network (50% EV adoption)⁶

from New York utility Con Edison enables EV drivers to charge anywhere in the Con Edison service territory, be identified and earn rewards for charging outside of peak hours.

Improve grid information

Provide clear and detailed information publicly to businesses and entrepreneurs looking to invest in and install public charging infrastructure. For example, Californian utility PG&E has created an interactive mapping tool for network capacity highlighting the locations on their network where existing equipment has capacity and is ready to be utilised for EV charging. Utilities that can provide useful location information can reduce network investment and quicken approval cycles, ensuring that infrastructure owners can deploy rapidly, and keep up with market demand.

Assess adjacent opportunities from charging infrastructure

Utilities should begin to explore whether there are other opportunities that arise from the deployment of charging infrastructure, such as stationary storage. The deployment of battery storage at charging locations may

have the potential to reduce grid augmentation costs and enable charger deployment in areas of the network that would otherwise be prohibitive.

Work with charging manufacturers

Utilities are key to the transition to e-mobility, and they must quickly understand their role and how to work alongside new industry stakeholders. Collaboration and joint research will enable utilities to be at the forefront of emerging vehicle, charging and grid integration technologies.

For example, the US Department of Energy is facilitating such collaboration, recently announcing over US\$8 million in funding designed to bring together research institutions, utilities, automakers and charger manufacturers to work on the future of electric vehicle extreme fast charging. We expect to see more of these collaborations as the market develops.

In summary, the transition to EVs presents challenges but also significant opportunities for utilities organizations, but only if they define and execute their participation strategies ahead of the up-coming EV revolution.



Figure 3: Five-step action plan for utility companies